

ResiSHIELD RV RANGE

PRODUCT DATA SHEET

MODEL: RV2006E-TS-PL

Product Description

Dutypoint dedicated fire sprinkler pump set fitted with horizontal multistage pump, residential fire pump controller with UL listed PLC, stainless steel manifold, LPCB approved dual output pressure switch, pressure gauge, LPCB approved flow switch, lockable monitored discharge and suction valves, manual flow test outlet, automatic weekly test outlet with strainer and 1/2" solenoid, all pre-assembled and wired onto a single skid and compliant to BS9251:2021




Picture is for illustration purposes and may not represent the exact specification offered

Specification

Supply Voltage	415v 3 phase 50hz
Motor Starting Type	Soft Start
Max Head	94 m
Motor Size (P2)	7.5 kw
Full Load Current	14.4 amps
Suction Connection	2" BSP Female
Discharge Connection	2" BSP Female
Manual Flow Test Outlet	1 1/4" BSP Female
Automatic Weekly Test Outlet	1/2" BSP female
Max System Pressure	10 Bar
Max Operating Temperature	23 Degrees C

Performance Curve

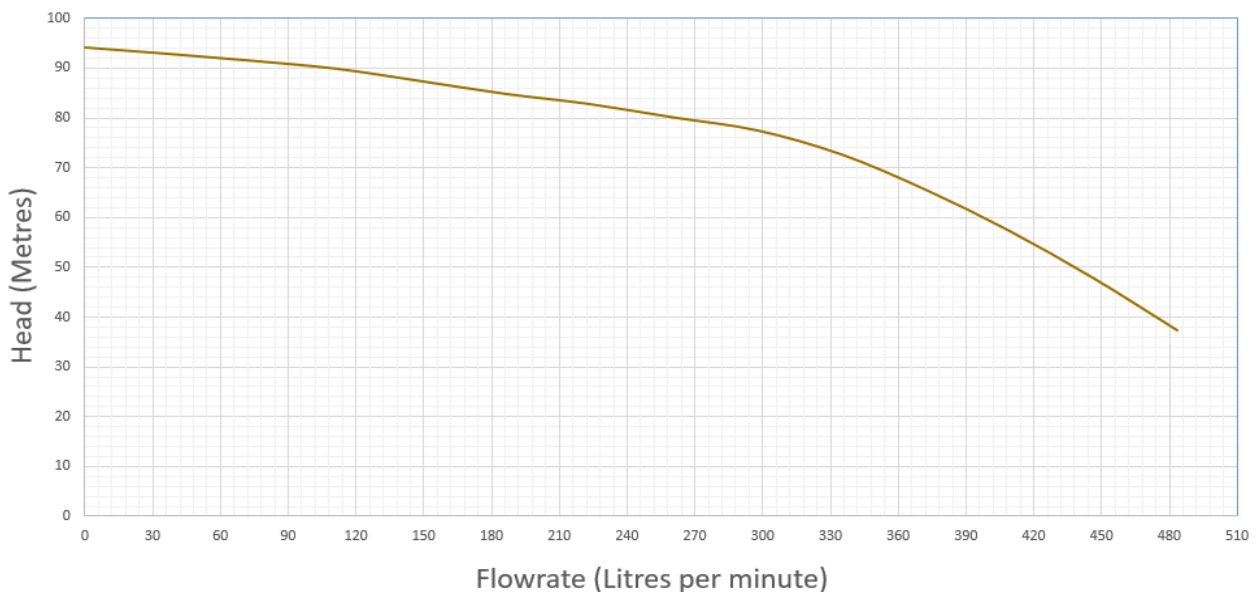

DUTYPOINT 
 PUMPS | SYSTEMS | SERVICING | KNOW-HOW