
VMV3-07-6V150D01

Product Description

The WRAS approved VMV is a versatile, high-performance cold water booster set constructed using premium components and a strict adherence to quality standards. Specifiers can tailor a booster set to the precise project requirements. The VMV can be delivered disassembled for on-site assembly if required.

- All products in the VMV Cold Water Pressure Booster range are fully WRAS approved.
- Variable speed pumps
- HIRISE technology which protects the building's pipework by ensuring the pumps start slowly during the initial fill process to prevent surge and consquent damage to the riser.
- Intelligent motor control
- Cyclic duty changeover which ensures even wear across all pumps in the system.
- Common alarm volt-free contract
- Hours run recorders
- Pressure set point adjustment
- Local electrical isolation and MCB protection.
- Integral anti-vibration mountings
- TrueStandby[™] ensures that every key component in the pressure booster has a back-up to keep the system operational in the rare occurrence of a component failure.

Performance per pump Inverter Controlled

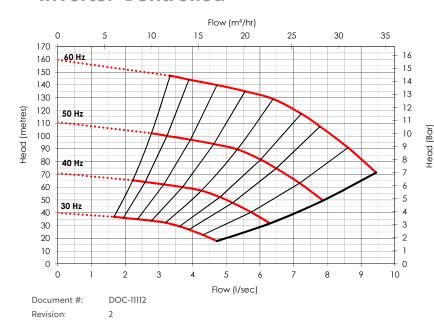



Specification

Suction connection	DN 100		
Delivery connection	DN 100		
Max operating flow	8.6 l/s		
Max operating pressure	14.4 bar		
Closed Valve pressure	15.6 bar		
Maximum system pressure Rating	16 bar		
Speed	Variable		
IP Rating	IP55		
Motor Power	15 kW		
Weight	760 kg		
Pressure Vessel(s)	70 litres		

www.dutypoint.com

Electrical Data


Electrical phase	3⊕
Operating speed range	30 - 60Hz
Supply Voltage	400 V
Full load current, per pump	26.8 A
Total Full load current	80.4 A

VMV model Codes

VMV3-07-6V150D01

Number of pumps	i	ii		i
Nominal flow (l/s)	 	 	ŀ	!
Frequency (50/60 Hz)		įį		į
Inverter Type		_		
Motor Power				l I
Pump Incremental number				i

Technical Drawing

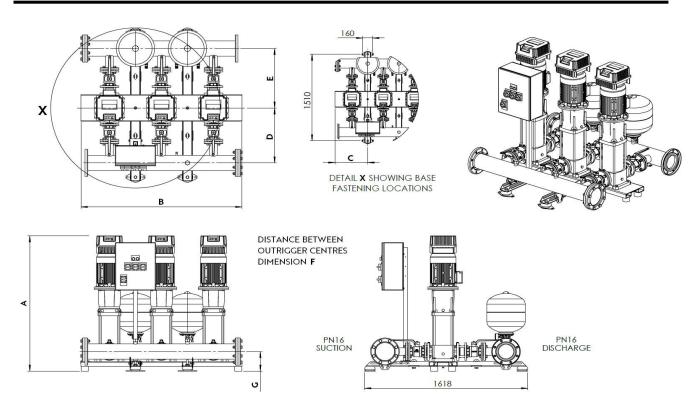

Drawing dimensions

Dimension A	1629
Dimension B	1250
Dimension C	425
Dimension D	509

Dimension E	551
Dimension F	400
Dimension G	190

Document #: DOC-11112
Revision: 2