

VMV3-15-5V055L01


Product Description

The WRAS approved VMV is a versatile, high-performance cold water booster set constructed using premium components and a strict adherence to quality standards. Specifiers can tailor a booster set to the precise project requirements. The VMV can be delivered disassembled for on-site assembly if required.



- All products in the VMV Cold Water Pressure Booster range are fully WRAS approved.
- Variable speed pumps
- HIRISE technology which protects the building's pipework by ensuring the pumps start slowly during the initial fill process to prevent surge and consequent damage to the riser.
- Intelligent motor control
- Cyclic duty changeover which ensures even wear across all pumps in the system.
- Common alarm volt-free contact
- Hours run recorders
- Pressure set point adjustment
- Local electrical isolation and MCB protection.
- Integral anti-vibration mountings
- TrueStandby™ ensures that every key component in the pressure booster has a back-up to keep the system operational in the rare occurrence of a component failure.

Performance per pump Inverter Controlled

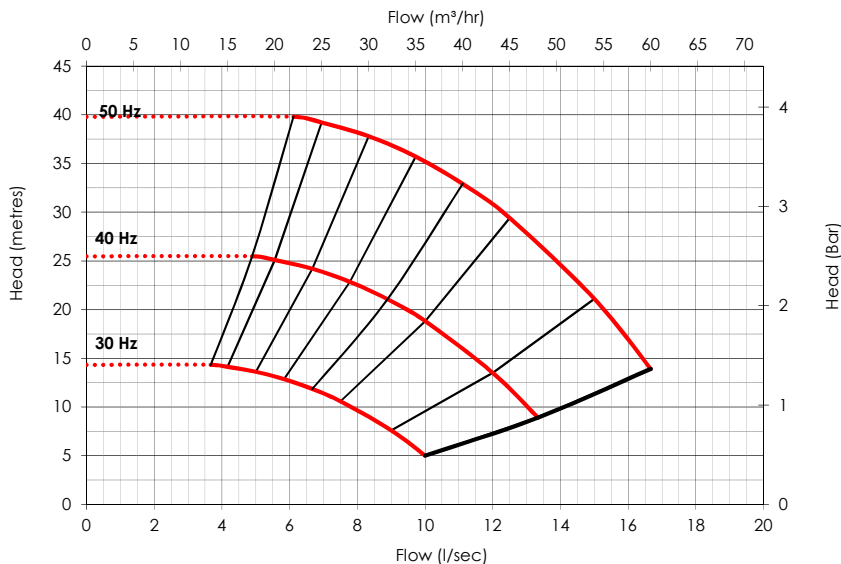

Document #: DOC-11120
Revision: 2



Specification

Suction connection	DN 150
Delivery connection	DN 150
Max operating flow	16.7 l/s
Max operating pressure	3.9 bar
Closed Valve pressure	3.9 bar
Maximum system pressure Rating	16 bar
Speed	Variable
IP Rating	IP55
Motor Power	5.5 kW
Weight	790 kg
Pressure Vessel(s)	70 litres
Maximum operating temperature	40 °C

DUTYPOINT

www.dutypoint.com

Electrical Data


Electrical phase	3 Φ
Operating speed range	30 - 50Hz
Supply Voltage	400 V
Full load current, per pump	10.4 A
Total Full load current	31.2 A

VMV model Codes

VMV3-15-5V055L01

Number of pumps	
Nominal flow (l/s)	
Frequency (50/60 Hz)	
Inverter Type	
Motor Power	
Pump Incremental number	

Technical Drawing

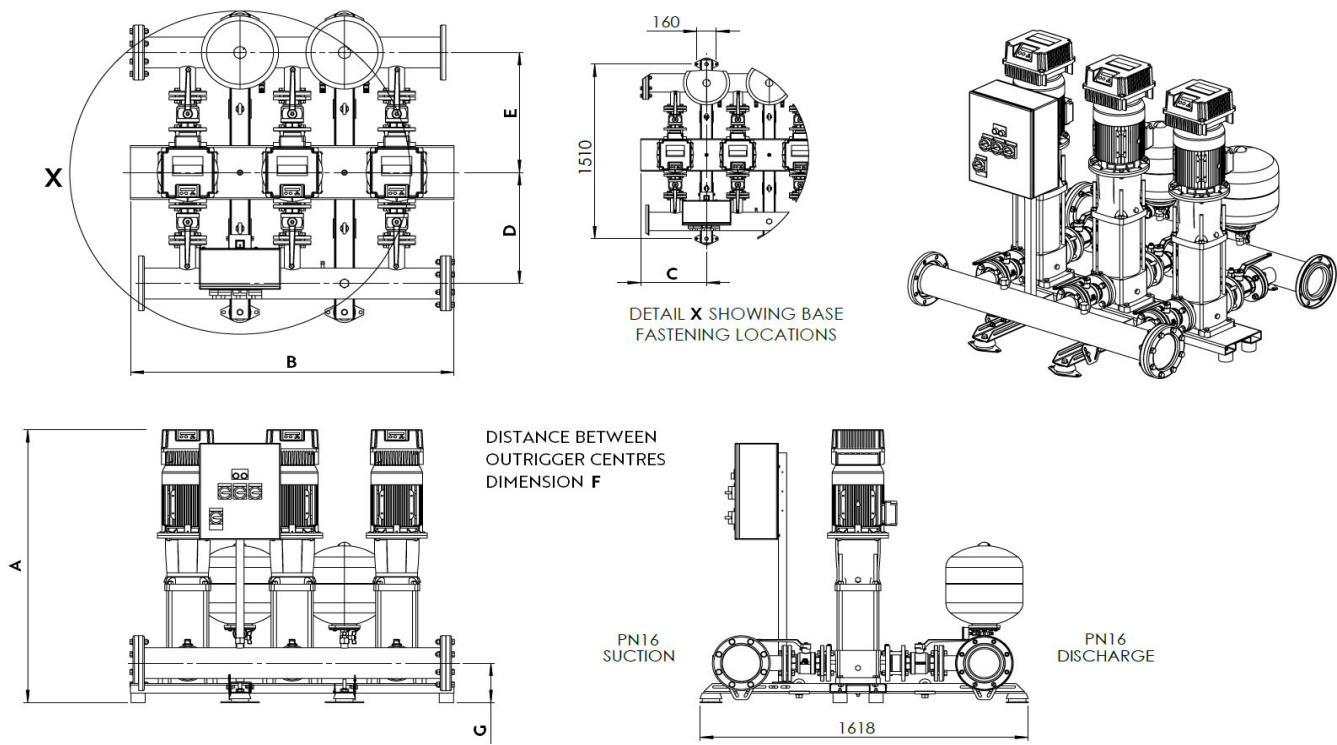

Drawing dimensions

Dimension A	1347
Dimension B	1595
Dimension C	540
Dimension D	621

Dimension E	672
Dimension F	515
Dimension G	240