#### VMV3-15-5V110L02


#### **Product Description**

The WRAS approved VMV is a versatile, high-performance cold water booster set constructed using premium components and a strict adherence to quality standards. Specifiers can tailor a booster set to the precise project requirements. The VMV can be delivered disassembled for on-site assembly if required.



- All products in the VMV Cold Water Pressure Booster range are fully WRAS approved.
- Variable speed pumps
- HIRISE technology which protects the building's pipework by ensuring the pumps start slowly during the initial fill process to prevent surge and consquent damage to the riser.
- Intelligent motor control
- Cyclic duty changeover which ensures even wear across all pumps in the system.
- Common alarm volt-free contract
- Hours run recorders
- Pressure set point adjustment
- Local electrical isolation and MCB protection.
- Integral anti-vibration mountings
- TrueStandby<sup>™</sup> ensures that every key component in the pressure booster has a back-up to keep the system operational in the rare occurrence of a component failure.

#### Performance per pump **Inverter Controlled**

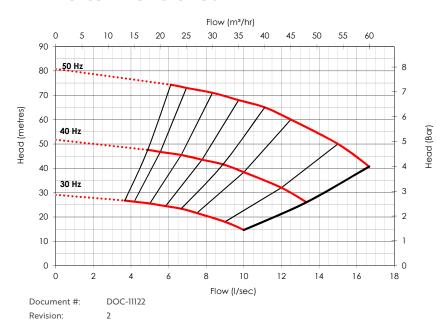



#### **Specification**

Suction connection	DN 150	
Delivery connection	DN 150	
Max operating flow	16.7 l/s	
Max operating pressure	7.3 bar	
Closed Valve pressure	7.9 bar	
Maximum system pressure Rating	16 bar	
Speed	Variable	
Speed IP Rating	Variable IP55	
·		
IP Rating	IP55	
IP Rating  Motor Power	IP55	



www.dutypoint.com

## **Electrical Data**


Electrical phase	3⊕
Operating speed range	30 - 50Hz
Supply Voltage	400 V
Full load current, per pump	20.6 A
Total Full load current	61.8 A

#### **VMV model Codes**

# VMV3-15-5V110L02

Number of pumps	įį	į	
Nominal flow (l/s)	<u>. i i</u>	į	<u> </u>
Frequency (50/60 Hz)		l I	<u> </u>
Inverter Type		[ ]	
Motor Power			
Pump Incremental number	er		

## **Technical Drawing**

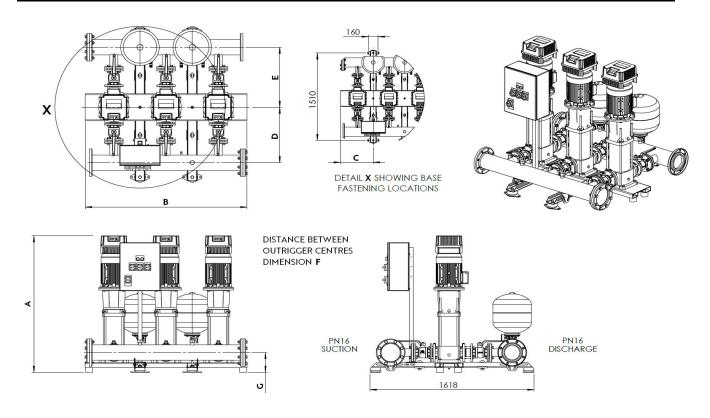

## **Drawing dimensions**

Dimension A	1443
Dimension B	1595
Dimension C	540
Dimension D	621

Dimension E	672
Dimension F	515
Dimension G	240

DOC-11122 Document #: 2 Revision:







