
#### VMV4-15-5H185L02

#### **Product Description**

The WRAS approved VMV is a versatile, high-performance cold water booster set constructed using premium components and a strict adherence to quality standards. Specifiers can tailor a booster set to the precise project requirements. The VMV can be delivered disassembled for on-site assembly if required.

- All products in the VMV Cold Water Pressure Booster range are fully WRAS approved.
- Variable speed pumps
- HIRISE technology which protects the building's pipework by ensuring the pumps start slowly during the initial fill process to prevent surge and consquent damage to the riser.
- Intelligent motor control
- Cyclic duty changeover which ensures even wear across all pumps in the system.
- Common alarm volt-free contract
- Hours run recorders
- Pressure set point adjustment
- Local electrical isolation and MCB protection.
- Integral anti-vibration mountings
- TrueStandby<sup>™</sup> ensures that every key component in the pressure booster has a back-up to keep the system operational in the rare occurrence of a component failure.

#### Performance per pump **Inverter Controlled**

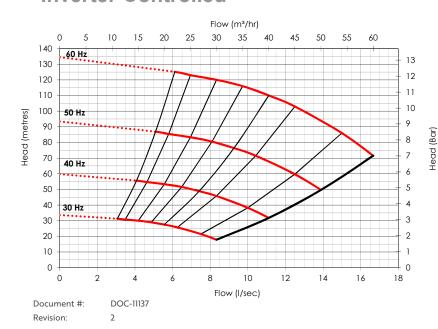



#### **Specification**

Suction connection	DN 150	
Delivery connection	DN 150	
Max operating flow	16.7 l/s	
Max operating pressure	12.3 bar	
Closed Valve pressure	13.2 bar	
Maximum system pressure Rating	16 bar	
Speed	Variable	
IP Rating	IP55	
Motor Power	18.5 kW	
Weight	1600 kg	
Pressure Vessel(s)	105 litres	
Maximum operating temperature	40 °C	



www.dutypoint.com

# **Electrical Data**


Electrical phase	3⊕
Operating speed range	30 - 50Hz
Supply Voltage	400 V
Full load current, per pump	33.7 A
Total Full load current	134.8 A


# **VMV model Codes**


# VMV4-15-5H185L02


Number of pumps	į	į	
Nominal flow (l/s)	i		<u> </u>
Frequency (50/60 Hz)			
Inverter Type		I	] i
Motor Power			
Pump Incremental number	er		


# **Technical Drawing**

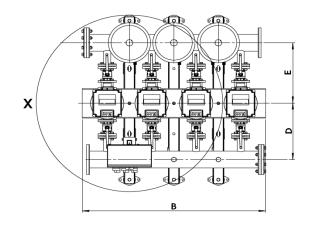



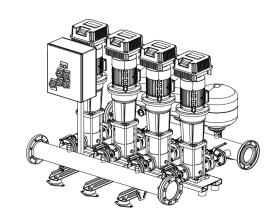

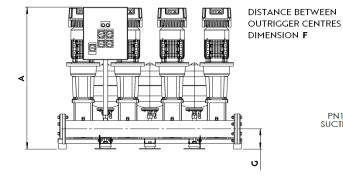

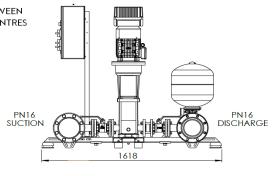

# **Drawing dimensions**

Dimension A	1678
Dimension B	2110
Dimension C	540
Dimension D	621

Dimension E	672
Dimension F	515
Dimension G	240

DOC-11137 Document #: Revision:







