
VMV4-15-5V110L02

Product Description

The WRAS approved VMV is a versatile, high-performance cold water booster set constructed using premium components and a strict adherence to quality standards. Specifiers can tailor a booster set to the precise project requirements. The VMV can be delivered disassembled for on-site assembly if required.

- All products in the VMV Cold Water Pressure Booster range are fully WRAS approved.
- Variable speed pumps
- HIRISE technology which protects the building's pipework by ensuring the pumps start slowly during the initial fill process to prevent surge and consequent damage to the riser.
- Intelligent motor control
- Cyclic duty changeover which ensures even wear across all pumps in the system.
- Common alarm volt-free contract
- Hours run recorders
- Pressure set point adjustment
- Local electrical isolation and MCB protection.
- Integral anti-vibration mountings
- TrueStandbyTM ensures that every key component in the pressure booster has a back-up to keep the system operational in the rare occurrence of a component failure.

Performance per pump Inverter Controlled

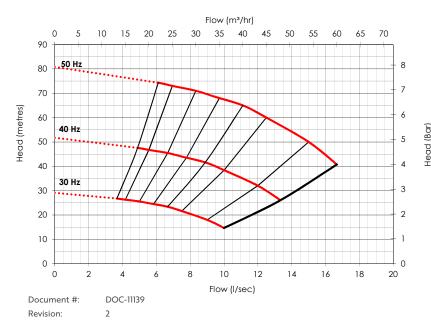



Specification



Suction connection	DN 150		
Delivery connection	DN 150		
Max operating flow	16.7 l/s		
Max operating pressure	7.3 bar		
Closed Valve pressure	7.9 bar		
Maximum system pressure Rating	16 bar		
Speed	Variable		
IP Rating	IP55		
Motor Power	11 kW		
Weight	1270 kg		
Pressure Vessel(s)	105 litres		
Maximum operating temperature	40 °C		



www.dutypoint.com

Electrical Data


Electrical phase	3⊕
Operating speed range	30 - 50Hz
Supply Voltage	400 V
Full load current, per pump	20.6 A
Total Full load current	82.4 A


VMV model Codes


VMV4-15-5V110L02


Number of pumps	į	į	į	
Nominal flow (l/s)	<u>i</u> j		į	
Frequency (50/60 Hz)			I I	
Inverter Type		!		
Motor Power			_ <u>i</u>	
Pump Incremental number				


Technical Drawing

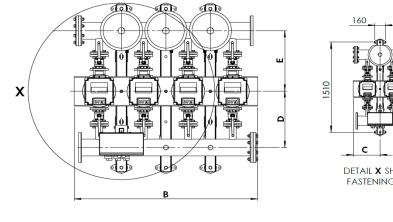



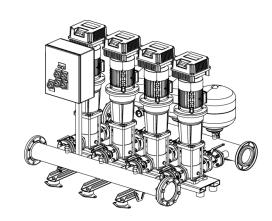

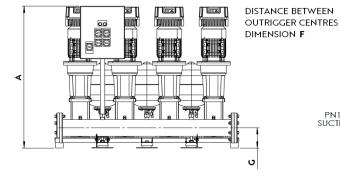



Drawing dimensions

Dimension A	1443		
Dimension B	2110		
Dimension C	540		
Dimension D	621		

Dimension E	672
Dimension F	515
Dimension G	240

DOC-11139 Document #: Revision:







