

## VMV3-15-5V150L02


### Product Description

The WRAS approved VMV is a versatile, high-performance cold water booster set constructed using premium components and a strict adherence to quality standards. Specifiers can tailor a booster set to the precise project requirements. The VMV can be delivered disassembled for on-site assembly if required.



- All products in the VMV Cold Water Pressure Booster range are fully WRAS approved.
- Variable speed pumps
- HIRISE technology which protects the building's pipework by ensuring the pumps start slowly during the initial fill process to prevent surge and consequent damage to the riser.
- Intelligent motor control
- Cyclic duty changeover which ensures even wear across all pumps in the system.
- Common alarm volt-free contact
- Hours run recorders
- Pressure set point adjustment
- Local electrical isolation and MCB protection.
- Integral anti-vibration mountings
- TrueStandby™ ensures that every key component in the pressure booster has a back-up to keep the system operational in the rare occurrence of a component failure.

### Performance per pump Inverter Controlled

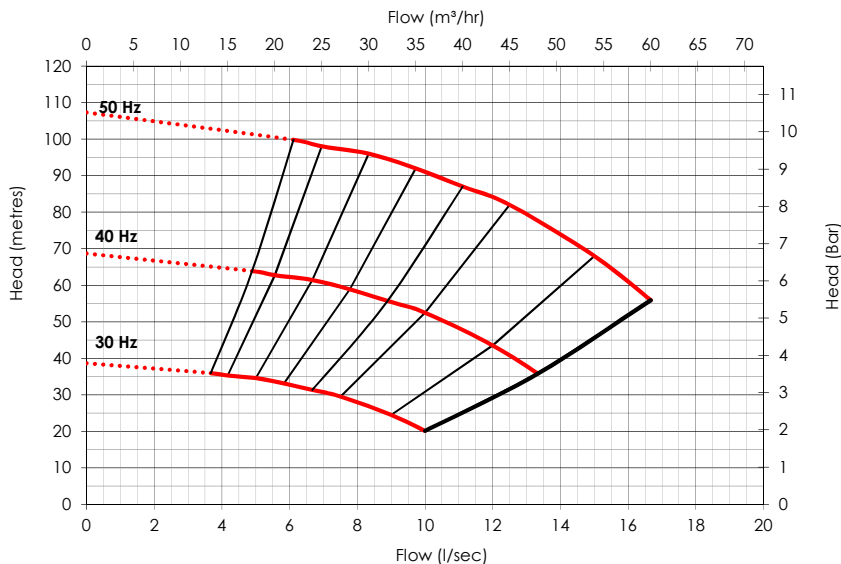

Document #: DOC-11123  
Revision: 2



### Specification

Suction connection	DN 150
Delivery connection	DN 150
Max operating flow	16.7 l/s
Max operating pressure	9.8 bar
Closed Valve pressure	10.5 bar
Maximum system pressure Rating	16 bar
Speed	Variable
IP Rating	IP55
Motor Power	15 kW
Weight	1120 kg
Pressure Vessel(s)	70 litres
Maximum operating temperature	40 °C

**DUTYPOINT**

[www.dutypoint.com](http://www.dutypoint.com)

## Electrical Data

Electrical phase	3 $\Phi$
Operating speed range	30 - 50Hz
Supply Voltage	400 V
Full load current, per pump	27.5 A
Total Full load current	82.5 A

## VMV model Codes

# VMV3-15-5VI50L02

Number of pumps

Nominal flow (l/s)


Frequency (50/60 Hz)

Inverter Type

Motor Power

Pump Incremental number

## Technical Drawing

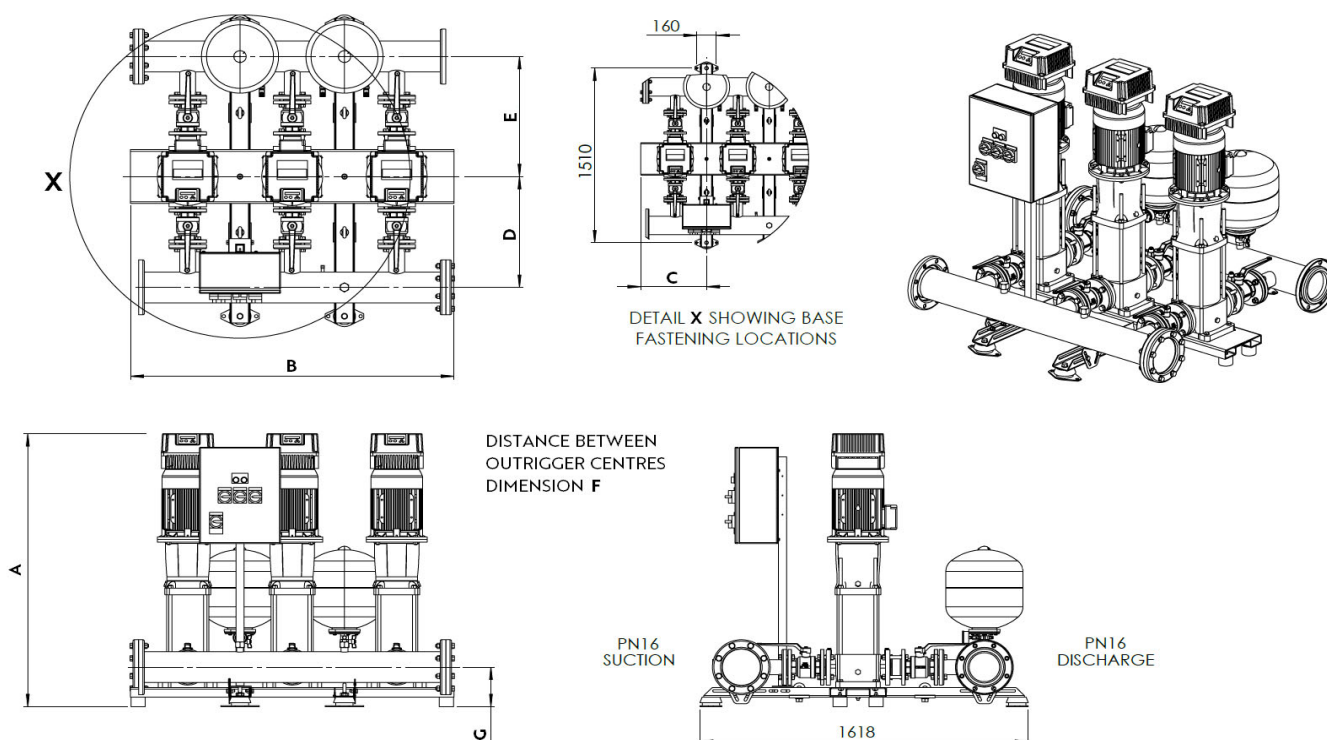

## Drawing dimensions

Dimension A	1584
Dimension B	1595
Dimension C	540
Dimension D	621

Dimension E	672
Dimension F	515
Dimension G	240

Document #: DOC-11123  
Revision: 2



**DUTYPOINT**  
[www.dutypoint.com](http://www.dutypoint.com)